

## Data Sheet - Type PB (Untied)

### Untied Pump Bellows – Type PB (Untied)

The PB range of pump bellows, also known as flexible connectors are designed to be used where the temperature and/or flow media is not suitable for moulded rubber bellows. The multiply bellows membrane is particularly effective for absorbing vibration, noise and the combination of lateral and axial movements, usually resulting from pumped systems on suction and discharge.

We can offer our Pump Bellows range both Tied and Untied. The tie bars will prevent elongation due to the internal pressure thrust. They are suitable for use on LTHW, MTHW, HTHW, Drinking Water, Steam & other gasses.



#### Standard construction

- Membrane: 316 Stainless Steel Multiply
- Mild Steel Standard Round Flanges


#### Working conditions

- Design Temperature: 300°C
- Design Pressure: 10 bar

#### Options

- **Vanstone ends to give all wetted parts in stainless steel**
- Membranes in special alloys, ie Incoloy 825, 310 stainless steel etc.
- Flanges to suit ie BS, JIS, DIN, ASA
- External covers/insulation
- Swivel Flanges
- Internal Flow Sleeve

Codes	NB (Ins & mm)		LN (mm)	Axial Movement	Lateral Movement
PB050	2"	50	130	3	3
PB065	2½"	65	130	3	3
PB080	3"	80	130	4	3
PB100	4"	100	130	4	3
PB125	5"	125	150	3	3
PB150	6"	150	150	4	3
PB200	8"	200	200	4	3
PB250	10"	250	200	4	3
PB300	12"	300	200	4	3

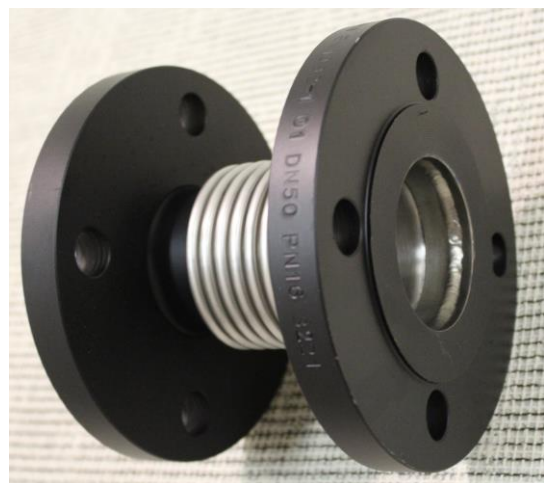

Pump Bellows must be securely anchored & adequately guided to ensure their correct performance.  
Omitting anchors & guides may result in failure of the system. All Quick-Steel Ltd products should be installed in accordance with our fitting instructions.



#### Data Sheets – Type PB

11 Dalton Way, Midpoint 18, Middlewich, Cheshire, CW10 0HU

Tel: 01606 862225 Fax: 01606 593539 Email: [sales@quicksteelltd.co.uk](mailto:sales@quicksteelltd.co.uk) Website: [www.quicksteelltd.co.uk](http://www.quicksteelltd.co.uk)

Company Registration No. 4702194 VAT Registration No. 811 9492 25